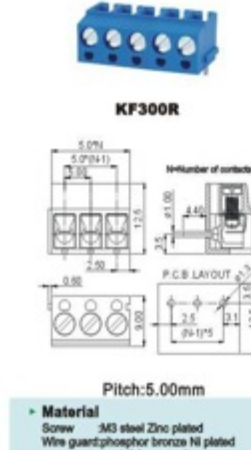
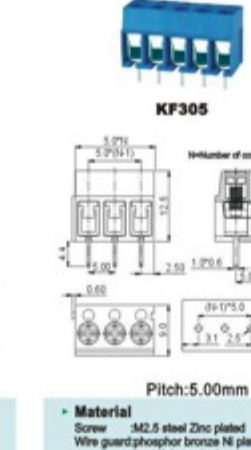
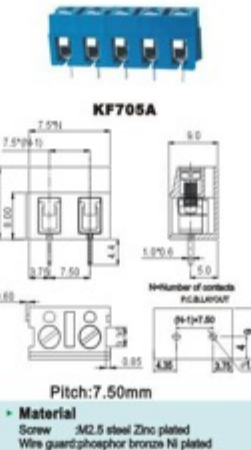
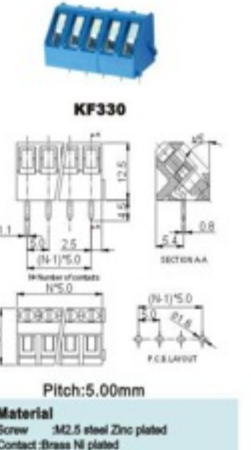
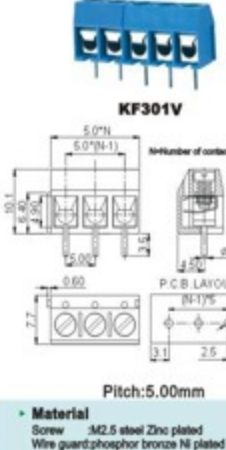
 <p>KF300</p> <p>Pitch: 5.00mm</p> <p>Material Screw M3 steel zinc plated Wire phosphor bronze Ni plated or stainless steel Pin header: Brass, Ti plated Housing: PBT, UL94V-0</p> <p>Electrical Rated voltage 300V Rated current 12A Contact resistance 20mΩ Insulation resistance 5000MΩ/1000V Withstanding Voltage AC1500V/1Min Wire range 22-14AWG 2.5mm²</p> <p>Mechanical Temp. Range -40°C~+105°C MAX Soldering 250°C for 5 Sec. Torque 0.4Nm (3.6lb.in) Strip length 4.5-5mm</p>	 <p>KF300R</p> <p>Pitch: 5.00mm</p> <p>Material Screw M3 steel zinc plated Wire phosphor bronze Ni plated or stainless steel Pin header: Brass, Ti plated Housing: PBT, UL94V-0</p> <p>Electrical Rated voltage 300V Rated current 12A Contact resistance 20mΩ Insulation resistance 5000MΩ/1000V Withstanding Voltage AC1500V/1Min Wire range 22-14AWG 2.5mm²</p> <p>Mechanical Temp. Range -40°C~+105°C MAX Soldering 250°C for 5 Sec. Torque 0.4Nm (3.6lb.in) Strip length 4.5-5mm</p>	 <p>KF305</p> <p>Pitch: 5.00mm</p> <p>Material Screw M2.5 steel zinc plated Wire phosphor bronze Ni plated or stainless steel Pin header: Brass, Ti plated Housing: PBT, UL94V-0</p> <p>Electrical Rated voltage 300V Rated current 12A Contact resistance 20mΩ Insulation resistance 5000MΩ/1000V Withstanding Voltage AC1500V/1Min Wire range 22-14AWG 2.5mm²</p> <p>Mechanical Temp. Range -40°C~+105°C MAX Soldering 250°C for 5 Sec. Torque 0.4Nm (3.6lb.in) Strip length 4.5-5mm</p>	 <p>KF705A</p> <p>Pitch: 7.50mm</p> <p>Material Screw M2.5 steel zinc plated Wire phosphor bronze Ni plated or stainless steel Pin header: Brass, Ti plated Housing: PBT, UL94V-0</p> <p>Electrical Rated voltage 300V Rated current 12A Contact resistance 20mΩ Insulation resistance 5000MΩ/1000V Withstanding Voltage AC1500V/1Min Wire range 22-14AWG 2.5mm²</p> <p>Mechanical Temp. Range -40°C~+105°C MAX Soldering 250°C for 5 Sec. Torque 0.4Nm (3.6lb.in) Strip length 4.5-5mm</p>	 <p>KF330</p> <p>Pitch: 5.00mm</p> <p>Material Screw M2.5 steel zinc plated Wire phosphor bronze Ni plated or stainless steel Pin header: Brass, Ti plated Housing: PBT, UL94V-0</p> <p>Electrical Rated voltage 300V Rated current 12A Contact resistance 20mΩ Insulation resistance 5000MΩ/1000V Withstanding Voltage AC1500V/1Min Wire range 22-14AWG 2.5mm²</p> <p>Mechanical Temp. Range -40°C~+105°C MAX Soldering 250°C for 5 Sec. Torque 0.4Nm (3.6lb.in) Strip length 4.5-5mm</p>	 <p>KF301V</p> <p>Pitch: 5.00mm</p> <p>Material Screw M2.5 steel zinc plated Wire phosphor bronze Ni plated or stainless steel Pin header: Brass, Ti plated Housing: PBT, UL94V-0</p> <p>Electrical Rated voltage 300V Rated current 12A Contact resistance 20mΩ Insulation resistance 5000MΩ/1000V Withstanding Voltage AC1500V/1Min Wire range 22-14AWG 2.5mm²</p> <p>Mechanical Temp. Range -40°C~+105°C MAX Soldering 250°C for 5 Sec. Torque 0.4Nm (3.6lb.in) Strip length 4.5-5mm</p>
--	--	---	--	--	--

01

02

01

02

03

04

05

06

07

08

09

10

